


The "TURBO-FIX" rigid foam board plug is suitable for lightweight fixings on unrendered and rendered façades and components where PU or polystyrene boards are used.

The plug with the specially moulded thread cuts in flush and prevents a cold bridge in the insulation. Simply screwing it in with a screwdriver or electric screwdriver and standard T40 bit saves time and money.

The short version with a length of 52 mm and screws  $\varnothing$  4.0 mm is used for lower loads (e.g. motion detectors, house number signs), while the longer version with a length of 82 mm and screws  $\varnothing$  4.5 mm is used for higher loads (e.g. letterboxes, outdoor lights, advertising boards).

**Temperature resistance:** -40°F to +158°F

**Safety coefficient:** 5

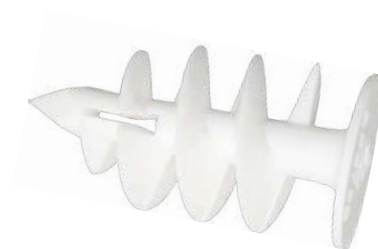

## Product specification

| Article Number | Dimensions<br>$\varnothing$ x L mm | Bit<br>Recording | Box<br>Contents | Outer carton<br>Contents |
|----------------|------------------------------------|------------------|-----------------|--------------------------|
| 12 210         | 27 x 52                            | T 40             | 50 pcs.         | 500 pcs.                 |
| 12 210         | 27 x 82                            | T 40             | 25 pcs.         | 250 pcs.                 |

### CONTACT US

☎ +49 (0) 3622 92040  
✉ [office@huefner-duebel.de](mailto:office@huefner-duebel.de)

### OUR ADDRESS

Gothaer Straße 50  
D-99880 Waltershausen

### ONLINE PRESENCE

🌐 [www.huefner-duebel.de](http://www.huefner-duebel.de)  
f #Hüfner-Dübel GmbH